

IT2000

4G (LTE), 3G, Wi-Fi and GSM MARINE ANTENNA

ANTENNA CODE	IT2000	
		Sail Boat
FREQUENCY RANGE	700 -960 MHz	1710-2700 MHz
GAIN	3 dBi	5 dBi
VSWR	≤ 1.5	≤ 1.2
IMPEDANCE	50 Ω	
POLARIZATION	Vertical	
MAX INPUT POWER	50W	
DC GROUND	Yes	
ANTENNA LENGTH (diamxh)	250mm (10") x 300 mm (12")	
ANTENNA WEIGHT	500 g (1,1 lb)	
TERMINATION	N female	
RADOME MATERIAL	U.V. resistant ASA	

Quick and easy installation of the cable:


First, open the radome of IT2000; Then, insert the cable with a pre-installed N male connector on the termination antenna (Fig.A); Finally, screw the connector counter clockwise by a plier (Fig. B)

N.B. The choice of the cable you must use depends by your installation. Anyway, the cable must be a low loss cable for the frequency range from 700 MHz to 3 GHz. The cable must be fitted with a N male connector.

A)



B)

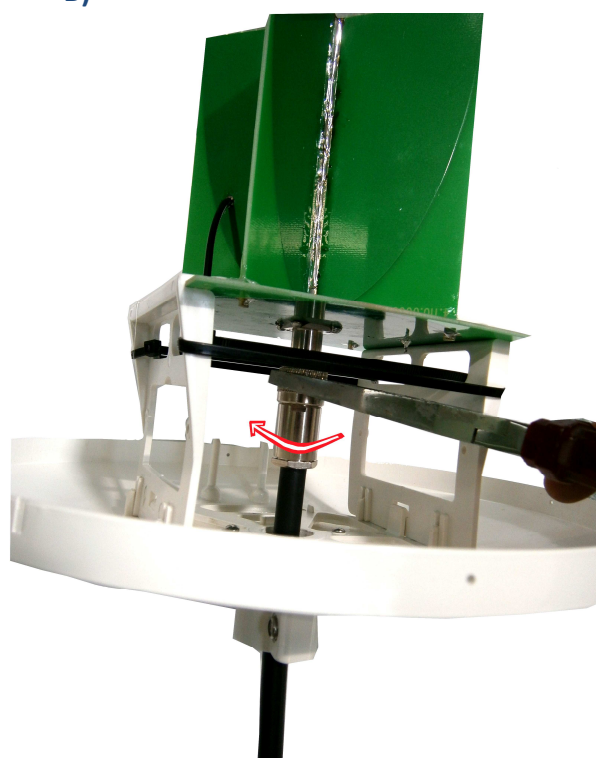

Specifications may change without notice.

For more info: www.glomex.it info@glomex.it

ACCESSORIES (Not Included)

Code: V9124



Stainless steel universal mount – 150 mm (6") height, 25 mm (1") diam.

Code: V9123



Stainless steel Masthead mount – 25 mm (1") diam. Long 16,5 cm (6,5")

Code: V9173TV



Stainless steel Masthead mount – 25 mm (1") diam. Long 27,5 cm (10,8")

